

STEREO AUDIO / VIDEO SWITCHER


4 SOURCE & 1 STATION

FEATURES:



- ◆ 4 Video & Audio Inputs
- ◆ 3 Video & Audio Outputs
- ◆ Power On Demand - "No Signal, No Power"
- ◆ Wide Operating Power Range - "10V ~ 30V"

SPECIFICATION:

Power Source: DC 12V / 24V
 Range of Operating Voltage: DC 10V ~ 30V
 Power Consumption: 2.5W max. (ON)
 0.15W max. (OFF)
 Video Band Width: 10 MHz
 Audio Band Width: 15 MHz
 Impedance of Video Input: 75 OHM
 Impedance of Audio Input: 8.2K OHM
 Operating Temperature: 0°C ~ 60°C
 Storage Temperature: -20°C ~ 60°C
 Operating Humidity: 85% RH
 Storage Humidity: 85% RH
 Power On/Off: Automatic
 DC Output: 3A max.
 Weight: 660 ± 10g

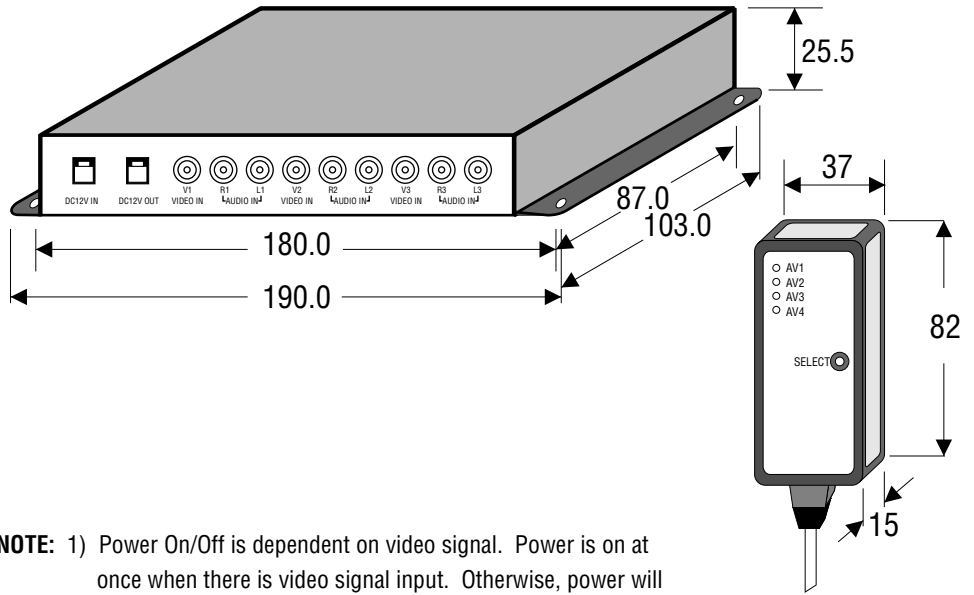

NOTE: 1) Power On/Off is dependent on video signal. Power is on at once when there is video signal input. Otherwise, power will be off when there are not any video signals input after 120 seconds.
 2) On/Off of DC output is also dependent on video signal.

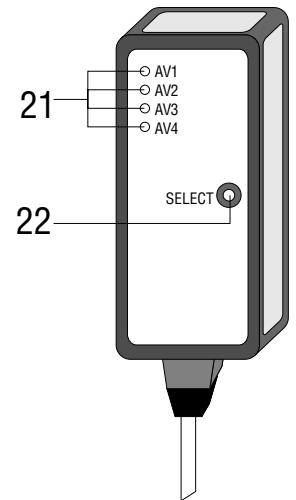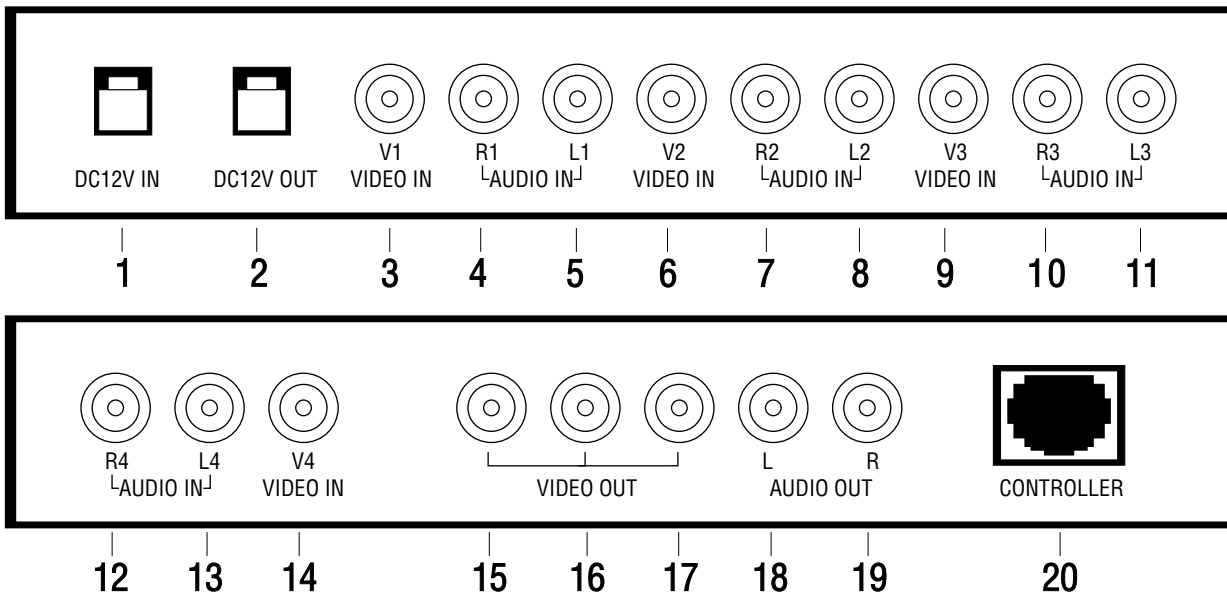

1. DC 12V ~ 24V IN	6. "VIDEO 2" IN	11. "AUDIO 3 L" IN	16. VIDEO OUT	21. LED INDICATOR
2. DC 12V ~ 24V OUT	7. "AUDIO 2 R" IN	12. "AUDIO 4 L" IN	17. VIDEO OUT	22. SELECTION KEY
3. "VIDEO 1" IN	8. "AUDIO 2 L" IN	13. "AUDIO 4 R" IN	18. AUDIO L OUT	
4. "AUDIO 1 R" IN	9. "VIDEO 3" IN	14. "VIDEO 4" IN	19. AUDIO R OUT	
5. "AUDIO 1 L" IN	10. "AUDIO 3 R" IN	15. VIDEO OUT	20. CABLE CONTROL	

*Technical information and diagrams provided by Acele Electronics is "as is" information. User assumes entire risk and responsibility. Acele Electronics recommends verifying all wire colors and operation before installing product.