

# LCDP5L

# TECHNICAL SPECIFICATIONS

## 5" COLOR TFT LCD MONITOR



WITH 2 VIDEO INPUTS WITH MIRROR IMAGE FUNCTION



### PART NO. LCDP5L

DISPLAY: 5" TFT-LCD Active Matrix Color Monitor  
INPUT SIGNAL: NTSC  
DOT FORMAT: 960 x 234  
BACK LIGHT: CCFT  
LAMP LIFE: 15,000 Hrs.  
BRIGHTNESS RATING: 300 NIT  
CONTRAST RATIO: 150:1  
VIEWING ANGLE (L/R/T/B): 50°/50°/15°/35°  
POWER REQUIREMENTS: 12VDC @ 600mA  
VIDEO INPUT LEVEL: 1.0 V p-p (Positive) 75 Ohm  
DIMENSION (HxWxD): 4 1/4" x 5 3/4" x 1 1/8"  
FLUSH MOUNT SHROUD DIMENSION (HxWxD): 4 13/16" x 6 3/8" x 1 1/8"  
MONITOR MOUNTING: 1/4" 20 thread on bottom  
OPERATING TEMPERATURE: 0° ~ 40°C  
STORAGE TEMPERATURE: -20° ~ 60°C  
WEIGHT: 1 LB

### WIRING DIAGRAM

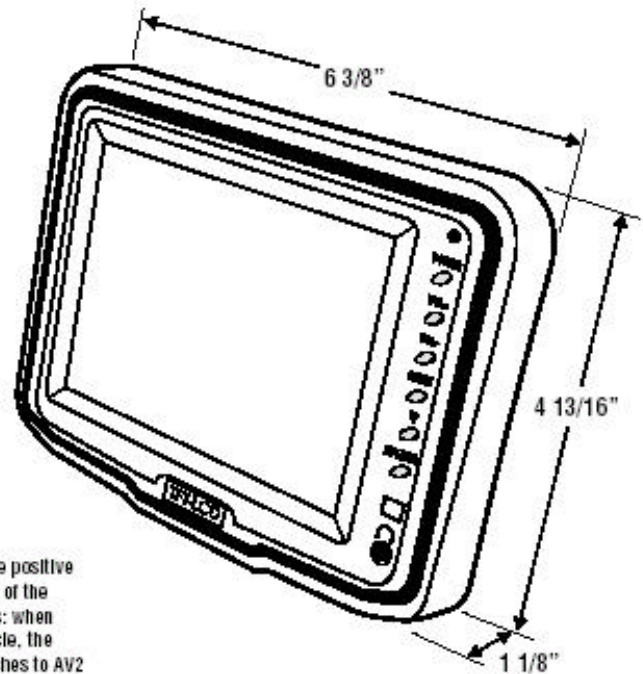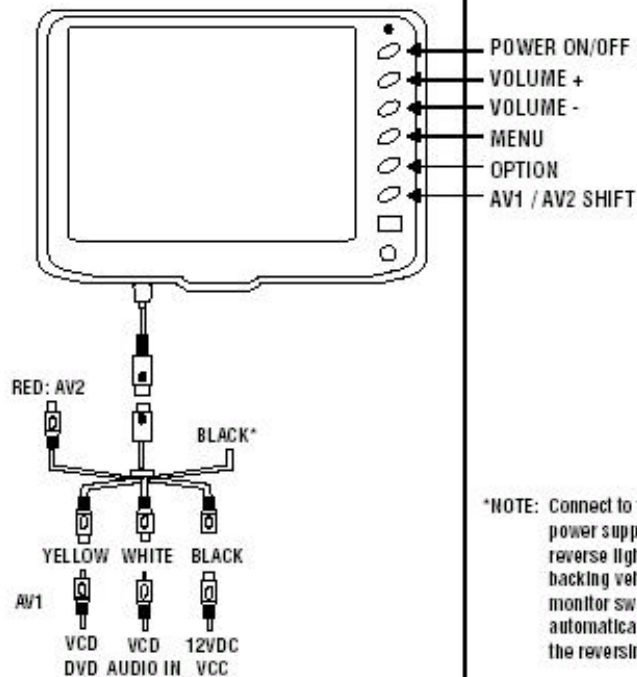

\*NOTE: Connect to the positive power supply of the reverse lights; when backing vehicle, the monitor switches to AV2 automatically and displays the reversing picture.

MILLER TECHNOLOGIES  
109 FAIRYTALE LANE  
SURF CITY, NC 28445

Miller Technologies  
[www.millertech.com](http://www.millertech.com)

Tel: (910) 328-2829  
Fax: (910) 328-5494  
Email: [info@millertech.com](mailto:info@millertech.com)